


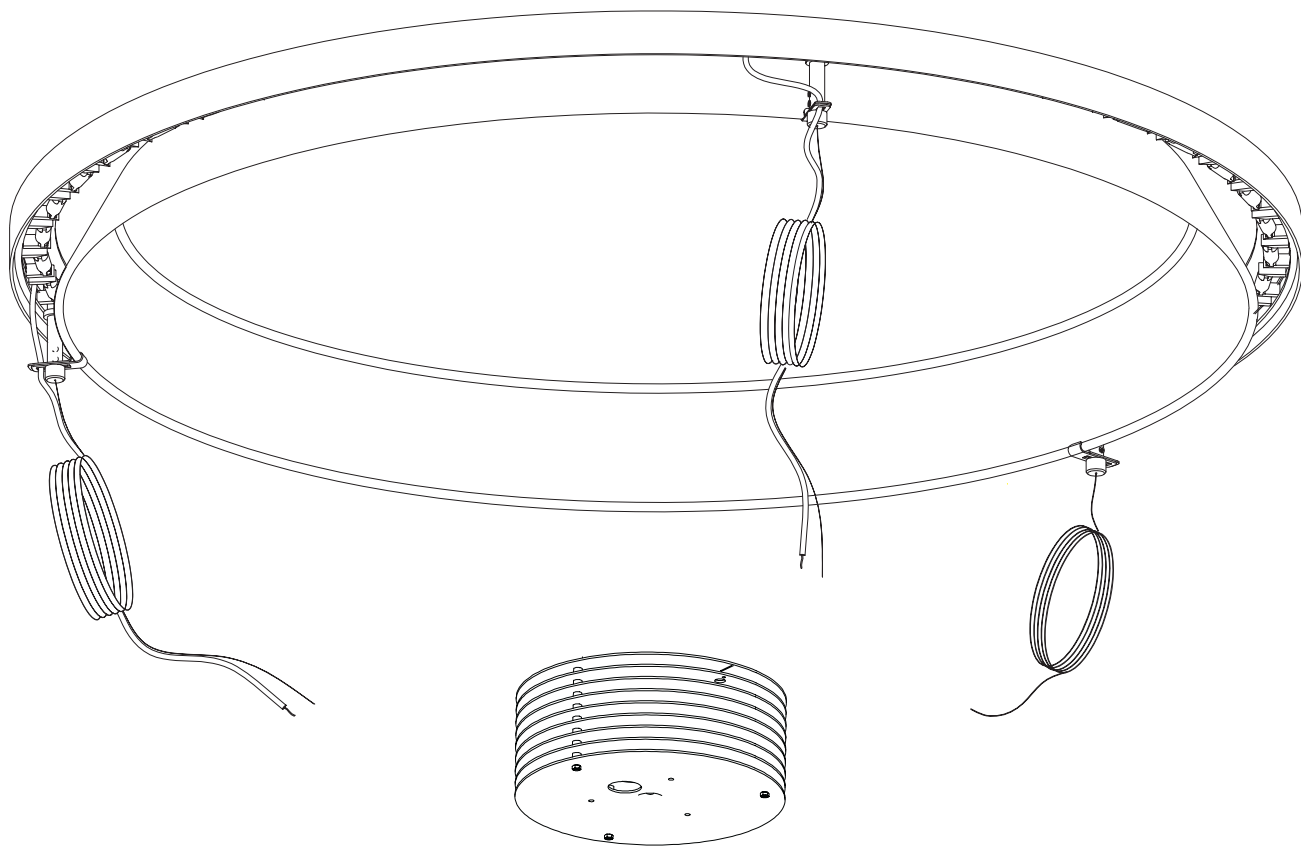

INSTRUCCIONES DE SEGURIDAD

Luminaria únicamente de uso doméstico y de interior.
Las conexiones eléctricas deben realizarse por personal especializado.

Antes de empezar las operaciones de montaje:

Deje sin tensión eléctrica la red.

Extraiga el fusible o deje el interruptor en posición de "desconectado".

Utilice siempre la bombilla recomendada.

48 bombillas Xenón 8.5W 24V 90 lm. 20.000h.
Recomendamos un magnetotérmico de curva lenta (5A) por unidad.

Fusible anti-corriente retardado tipo T 3.15A 5x20mm. con estructura de devanado en espiral.

Antes de sustituir la bombilla, asegúrese de desconectar la luminaria de la red, y esperar que esté fría al tacto.
El fabricante no se hace responsable del uso indebido de la luminaria.

SAFETY INSTRUCTIONS

The lamp is for domestic interior use only.

The lamp must be installed by a specialist.

Before connecting the lamp:

Be sure that there is no voltage in the feeding conductors coming from electrical mains.

Remove the fuse or switch off the main switch.

Always use the recommended bulb.

48 Xenon bulbs 8.5W 24V 95lm. 20.000h. We recommend a slow magnetothermic (5A) for each unit.

Delayed action surge protection fuse type T 3.15A 5x20mm with spiral spool.

Before replacing the bulb, switch off the main electrical switch and wait until the bulb has cooled down.

The manufacturer declines all responsibility for misuse of the lamp.

Características Técnicas / Technical characteristics:

EUROPE AC 230V. 50 Hz.

USA/JAPAN AC 110/128V. 60 Hz.




SANTA & COLE

NIMBA
(NIM 09)


INSTRUCCIONES DE MONTAJE

1


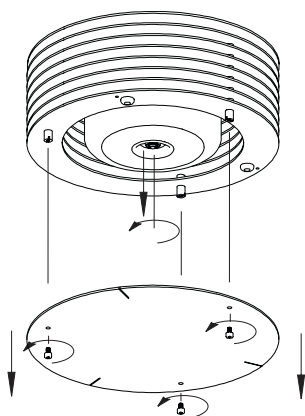


Peso del florón
Canopy's weight
8.5 Kg.



2

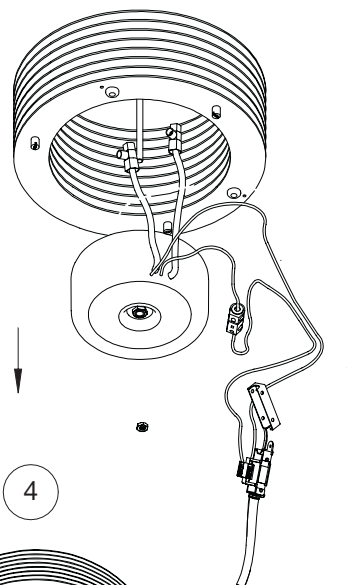

3

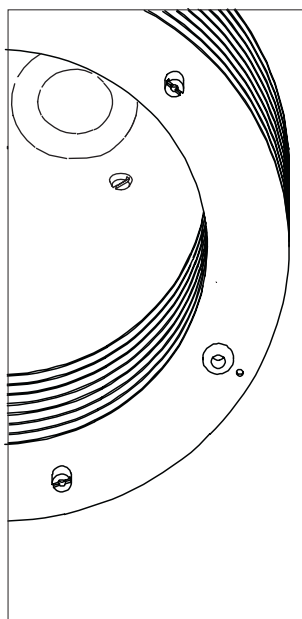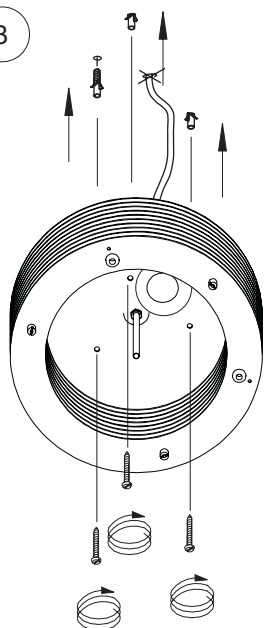

4



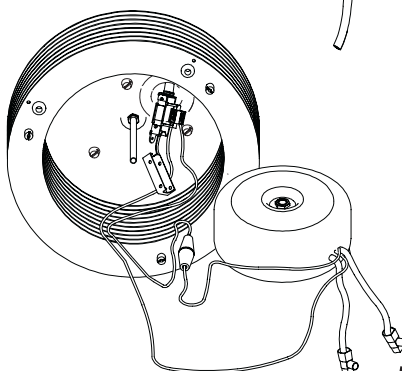


Magnetotérmico de curva lenta (5A) por unidad

Fusible anti-sobrecorriente
retardado (T) con
estructura de devanado en
espiral 3.15A 5x20mm.
Delayed action surge
protection fuse type (T) 3.15A
5x20mm. with spiral spool.

Transformador toroidal /
Toroidal Transformer
450V 24V

Intensidad secundario /
Secondary candle power
17A

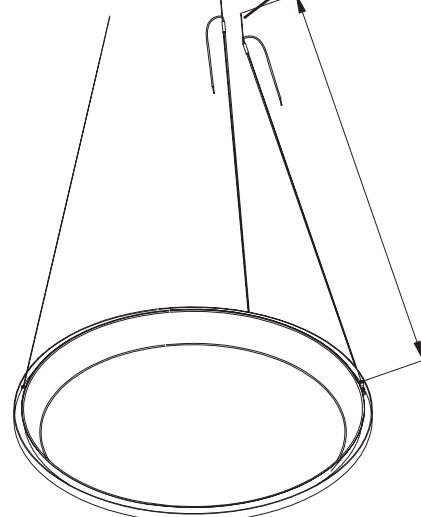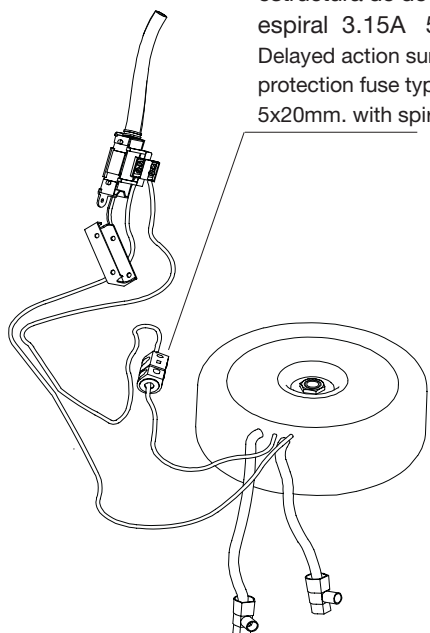


NOTA:

EL CABLE ELÉCTRICO DEBE CORTARSE A LA MEDIDA
NECESARIA PARA HACER UNA BUENA CONEXIÓN.
¡NO DEBE ENROLLARSE EL SOBRANTE! PUES AFECTA
AL FUNCIONAMIENTO DEL TRANSFORMADOR.


NOTE:

USE SUFFICIENT WIRE TO ENSURE A PROPER CONNECTION.
REMOVE EXCESS WIRE SO AS NOT TO AFFECT THE
TRANSFORMER'S PERFORMANCE.

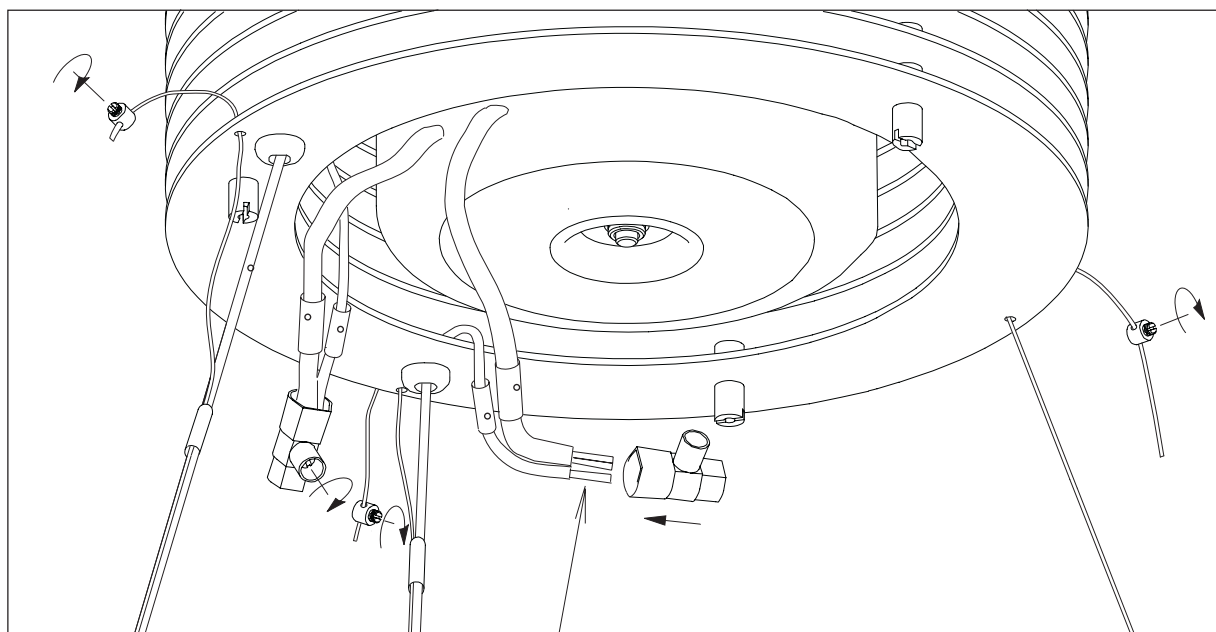



Pelar el cable
Peel the cable

5

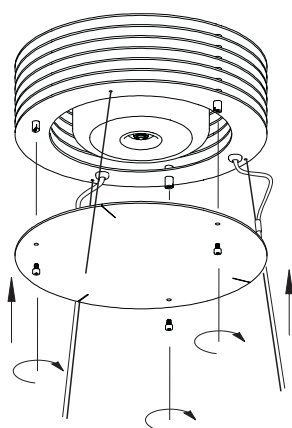



Peso del florón
Canopy's weight
8.5 Kg.

6



Fusible anti-sobrecorriente retardado (T) con estructura de devanado en espiral 3.15A 5x20mm. Delayed action surge protection fuse type (T) 3.15A 5x20mm. with spiral spool.

Magnetotérmico de curva lenta (5A) por unidad

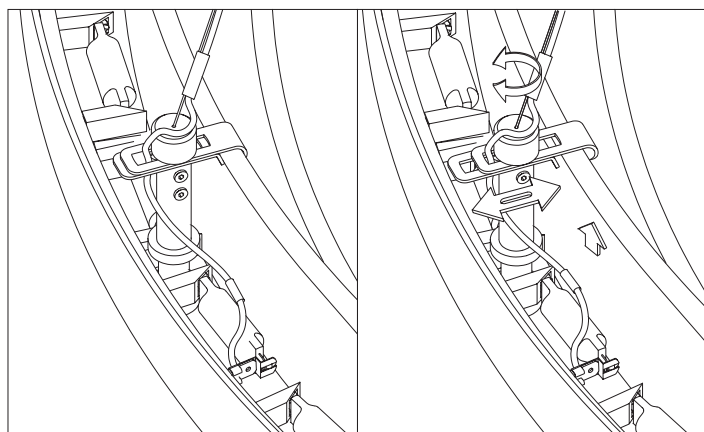

Transformador toroidal /
Toroidal Transformer
450V 24V

Intensidad secundario /
Secondary candle power
17A

NIMBA 09 408W 48 BOMBILLAS/BULBS 8,5W 24V